

RD98XS

Intelligent Super Repeater

DMR Simulcast and DMR Trunking upgradable

IP Multi-site Connection

Digital telephone Interconnection

RDAC Remote Management Software



RD98XS Intelligent Super Repeater


RD98XS is a 50W, DMR and Analog dual mode upgradable repeater which can work in analog and DMR conventional mode. It can be upgraded to trunking or simulcast mode by software only. One step upgrade package makes it easy to operate in different mode, analog conventional, MPT-1327, DMR conventional, DMR trunking and DMR simulcast with only one hardware platform.



Conventional Features

- **Repeater Diagnostic And Control (RDAC)**
RD98XS supports Remote (via IP port to connect to internet) and Local diagnostic (via USB) PC applications can monitor, diagnose and control the repeater status, thus increasing the maintenance efficiency. Hytera developed RDAC is able to support multiple master network connections to allow radio administrator to monitor multiple radio network upcoming!
- **Analogue Digital Auto switch**
RD98XS supports Analogue and Digital channel auto switching, allowing efficient frequency sharing between Analogue and Digital users during the digital migration.
- **Analogue/Digital Back-to-Back Interconnect**
RD98XS supports different operating mode of Analogue and Digital to interconnect for voice cross patch, allowing Analogue users to communicate to the Digital users and vice versa. This has allowed the smooth migration for Analogue users to the digital world!
- **Dual Slot Digital Audio Streaming**
RD98XS supports streaming of both the voice slots via the rear port accessory pins, allowing third party for capability expansion.
- **IP Multi-site Connection**
RD98XS supports network interconnection via the IP port of repeater to form a private radio network. This allows wide area coverage to meet dispersed locations data and voice communications.
- **Analogue/Digital Telephone Interconnect (via DTMF signaling)**
RD98XS supports simplex voice communications between radio and telephone users. It allows a radio user to make a telephone call; or a telephone user to make either a Group or Private call to radio users.
- **Analogue Scan**
RD98XS supports Analogue voice and signaling scan, allowing repeating of different Analogue voice users from various groups.

Upgrade to DMR Trunking Transceiver

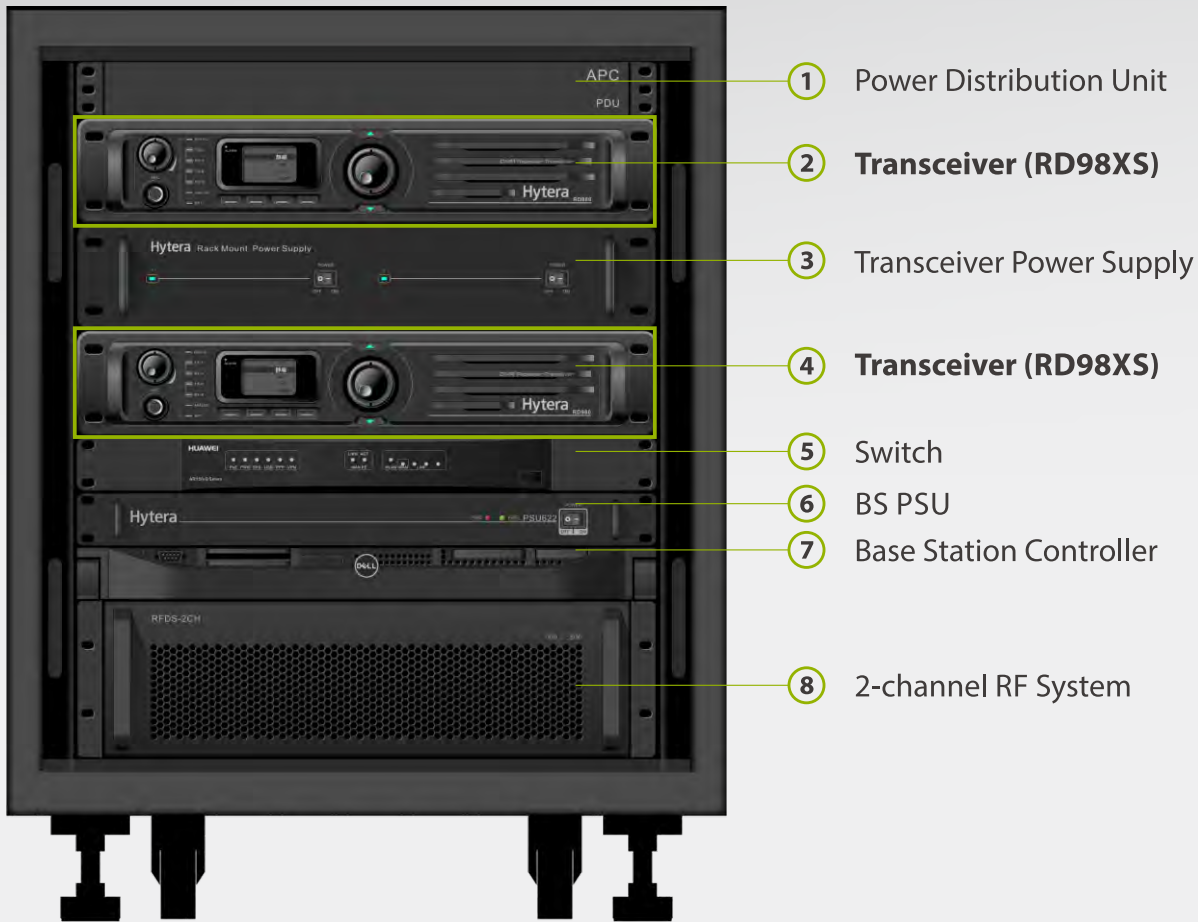

DMR trunking Lite 2 carrier BS

- **Open Standard**

DMR Trunking Lite is based on DMR tier III standard, defined by ETSI in 2005, which is a digital radio standard for professional radio users. With dedicated control channel, DMR Trunking Lite can achieve versatile functions.

- **Smooth Migration**

DMR Trunking Lite transceiver supports smooth migration from analog to digital, from conventional to trunking. Multi-modes provide you different choices for continual investment.

- **Integrated RF System**

Integrated 2-carrier RF system, significantly reduces the space and cost for divider, combiner and duplexer.

- **Non-centralized Structure Design**

Non-centralized structure is only used for less than 5 base stations.

It will ensure a cost-effective and flexible networking especially suited to small scale networks.

Upgrade to DMR Simulcast Transceiver



DMR Simulcast Single Carrier BS

- **Smooth Roaming and Handover**

In a simulcast system, the radio is capable of roaming and handover seamlessly between different BSs, the ongoing communication can continue normally during handover.

- **Dynamic Voting**

Simulcast system can provide good voice performance in overlap area as radios in overlap area can always receive the best voice frame through dynamic voting. As a voting center, MSO is used to analyze each voice frame received from Base Stations in real time. The best voice frame will be extracted and sent to radios.

- **Analog/Digital Self-adaptive**

Simulcast Base Station channels support working both in analog and digital mode, ensuring smooth migration from analog to digital network. Digital or analog mode is automatically selected based on the incoming signals.

- **Smart Subnetting and Patching**

According to management requirements, DMR simulcast system can be divided into different subnets by Base Station or by time slot of channel unit in each Base Station. Each subnet can work as an independent simulcast system.

Different subnets can be patched to make a larger subnet temporarily according to the requirements.

Upgrade Features


Flexible application via software or hardware upgrade:

- Digital conventional repeater
- DMR trunking transceiver
- Analog simulcast transceiver
- Digital simulcast transceiver
- Analog conventional repeater
- MPT trunking transceiver

RD98XS Accessories

Standard Accessories

Optional Accessories

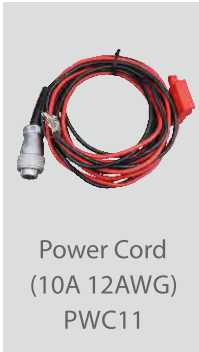

Power Cord
(10A 12AWG)
PWC11



Palm Microphone
SM16A1



Desktop Microphone
SM10A1



Build-in Duplexer
Installation Kit (for
DT11-DT17) BRK16



External Power Supply
(300W, backup power
applicable) PS22002



Bracket (2U)(black)
BRK12



Bracket (2U)(grey)
BRK14



10pin programming
cable (USB) PC37



DB26 data cable
(USB) PC40




Omni-directional
Antenna



Palm Microphone
(IP67) SM16A2



Back to Back Data
Cable PC49



Duplexer

DT11: Duplexer(Frequency: 380-470MHz) (Frequency Spacing:10MHz)(Non-RoHS)
 DT12: Duplexer(Frequency: 160-174MHz)(Tx/Rx Spacing:5MHz)(RoHS)
 DT13: Duplexer(Frequency: 148-160MHz)(Tx/Rx Spacing:5MHz)(RoHS)
 DT14: Duplexer(Frequency: 330-400MHz)(Tx/Rx Spacing:10MHz)(Non-RoHS)
 DT15: Duplexer(Frequency: 136-148MHz)(Tx/Rx Spacing:5MHz)(RoHS)
 DT16: Duplexer(Frequency: 440-480MHz)(Tx/Rx Spacing:5MHz)(RoHS)
 DT17: Duplexer(Frequency: 480-512MHz)(Tx/Rx Spacing:5MHz)(RoHS)
 DT23: Duplexer(Frequency: 136-174MHz)(Tx/Rx Spacing:4MHz)(Non-RoHS)

Pictures above are for reference only and may vary from actual products.



Specifications

General	Frequency Range	UHF1: 400-470MHz; UHF2: 450-520MHz UHF3: 350-400MHz; UHF5: 806-941MHz VHF1: 136-174MHz; VHF3: 210-270MHz	
	Channel Capacity	16	
	Channel Spacing	12.5kHz/20kHz/25kHz	
	Operating Voltage	13.6V ± 15%	
	Current Drain	Standby	<1.0A
		Transmit	<11A
	Frequency Stability	± 0.5ppm	
	Antenna Impedance	50Ω	
	Duty Cycle	100%	
	Dimensions (H× W× D)	88 x 483 x 366 mm	
	Weight	8.5Kg	
	LCD Display	220 x 176 pixels, 262000 colors, 2.0 inch, 4 rows	

Receiver	Sensitivity	Analog	0.28μV (12dB SINAD); 0.22μV (Typical)(12dB SINAD); 0.4μV (20dB SINAD)
		Digital	0.3μV/BER5%
	Adjacent Channel Selectivity	TIA-603	65dB @ 12.5kHz; 70dB @ 20/25kHz
		ETSI	65dB @ 12.5kHz; 70dB @ 20/25kHz
	Intermodulation	TIA-603	75dB @ 12.5/20/25kHz
		ETSI	70dB @ 12.5/20/25kHz
	Spurious Response Rejection	TIA-603	80dB @ 12.5/20/25kHz
		ETSI	80dB @ 12.5/20/25kHz
	Hum and Noise		40dB@12.5kHz 43dB@20kHz 45dB@25kHz
	Rated Audio Power Output		0.5W
	Rated Audio Distortion		≤ 3%
	Audio Response		+1 ~ -3dB
	Conducted Spurious Emission		<-57dBm

Transmitter	RF Power Output	UHF1/UHF2/UHF3: 1-50W (continuous) UHF5(851-870MHz): 1-35W (continuous) UHF5(935-941MHz): 1-30W (continuous) VHF1/VHF3: 1-50W (continuous)
	FM Modulation	11K0F3E @ 12.5kHz; 14K0F3E @ 20kHz; 16K0F3E @ 25kHz
	4FSK Digital Modulation	12.5kHz Data Only: 7K60FXD; 12.5kHz Data & Voice: 7K60FXW
	Conducted/ Radiated Emission	-36dBm <1GHz; -30dBm >1GHz
	Modulation Limiting	± 2.5kHz @ 12.5kHz; ± 4.0kHz @ 20kHz; ± 5.0kHz @ 25kHz
	FM Hum & Noise	40dB @ 12.5kHz; 43dB @ 20kHz; 45dB @ 25kHz
	Adjacent Channel Power	60dB @ 12.5kHz; 70dB @ 20/25kHz
	Audio Response	+1 ~ -3dB
	Audio Distortion	≤ 3%
	Digital Vocoder Type	AMBE++, SELP, NVOC, COMM
	Digital Protocol	ETSI-TS102 361-1,-2,-3

Environmental Specifications	
Operating Temperature	-30°C ~ +60°C
Storage Temperature	-40°C ~ +85°C

All Specifications are tested according to applicable standards, and subject to change without notice due to continuous development.
Notes: RD98XS, MD78X(G), PD78X(G), PD70X(G): X=0, 2, 5, 6 or 8, model number varies geographically. For details, please contact our regional sales representatives.



Hytera Communications Corporation Limited

Address: Hytera Tower, Hi-Tech Industrial Park North, Beihuan Rd.,
Nanshan District, Shenzhen, China

Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057

Http: //www.hytera.com Stock Code: 002583.SZ



Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Communications Co., Ltd.
© 2014 Hytera Communications Co., Ltd. All Rights Reserved.